



# Jay-EI 30295 & 30268 Microlites

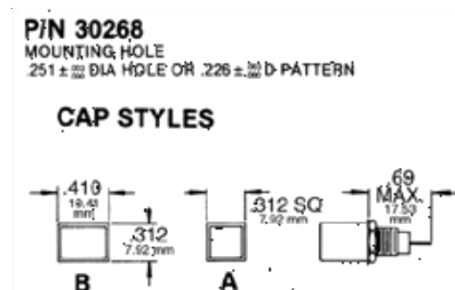


## Electrical Options

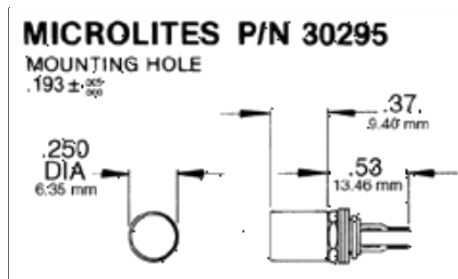

## Switch Options



## Lighting Options

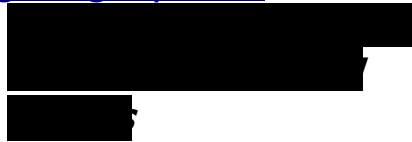

## Mechanical Options



## Environmental Options



## **Re-Lampable Miniature Indicator Light**

This unique Microlite features a square or rectangular lamp capsule. Re-lamping is accomplished by removing the plug-in lamp capsule and removing the lamp from the indicator body. Lamp used is a T1 bi-pin type available in 2.5V, 28V and four ranges of 5V.

### **Special Features:**

Unit mounts from rear of panel, re-lampable from the front of panel.

Mounts in panels up to 3/16 inch thick.

Standard 10-32 thread.

May be supplied with EMI screen

Alodine aluminum housing standard, black finish also available.

Available with Display Data and a variety of illumination colors.

### **Mechanical:**

Vibration: 10 to 500 Hz

Shock: Per MIL-L-3661, Method 1

Seal: Drip proof per MIL-L-3661

Sand and dust: Per MIL-L-3661

Salt spray: 96 hours

Temperature range: -55°C to +71C

Mounting torque: 2 to 3 in-lbs.